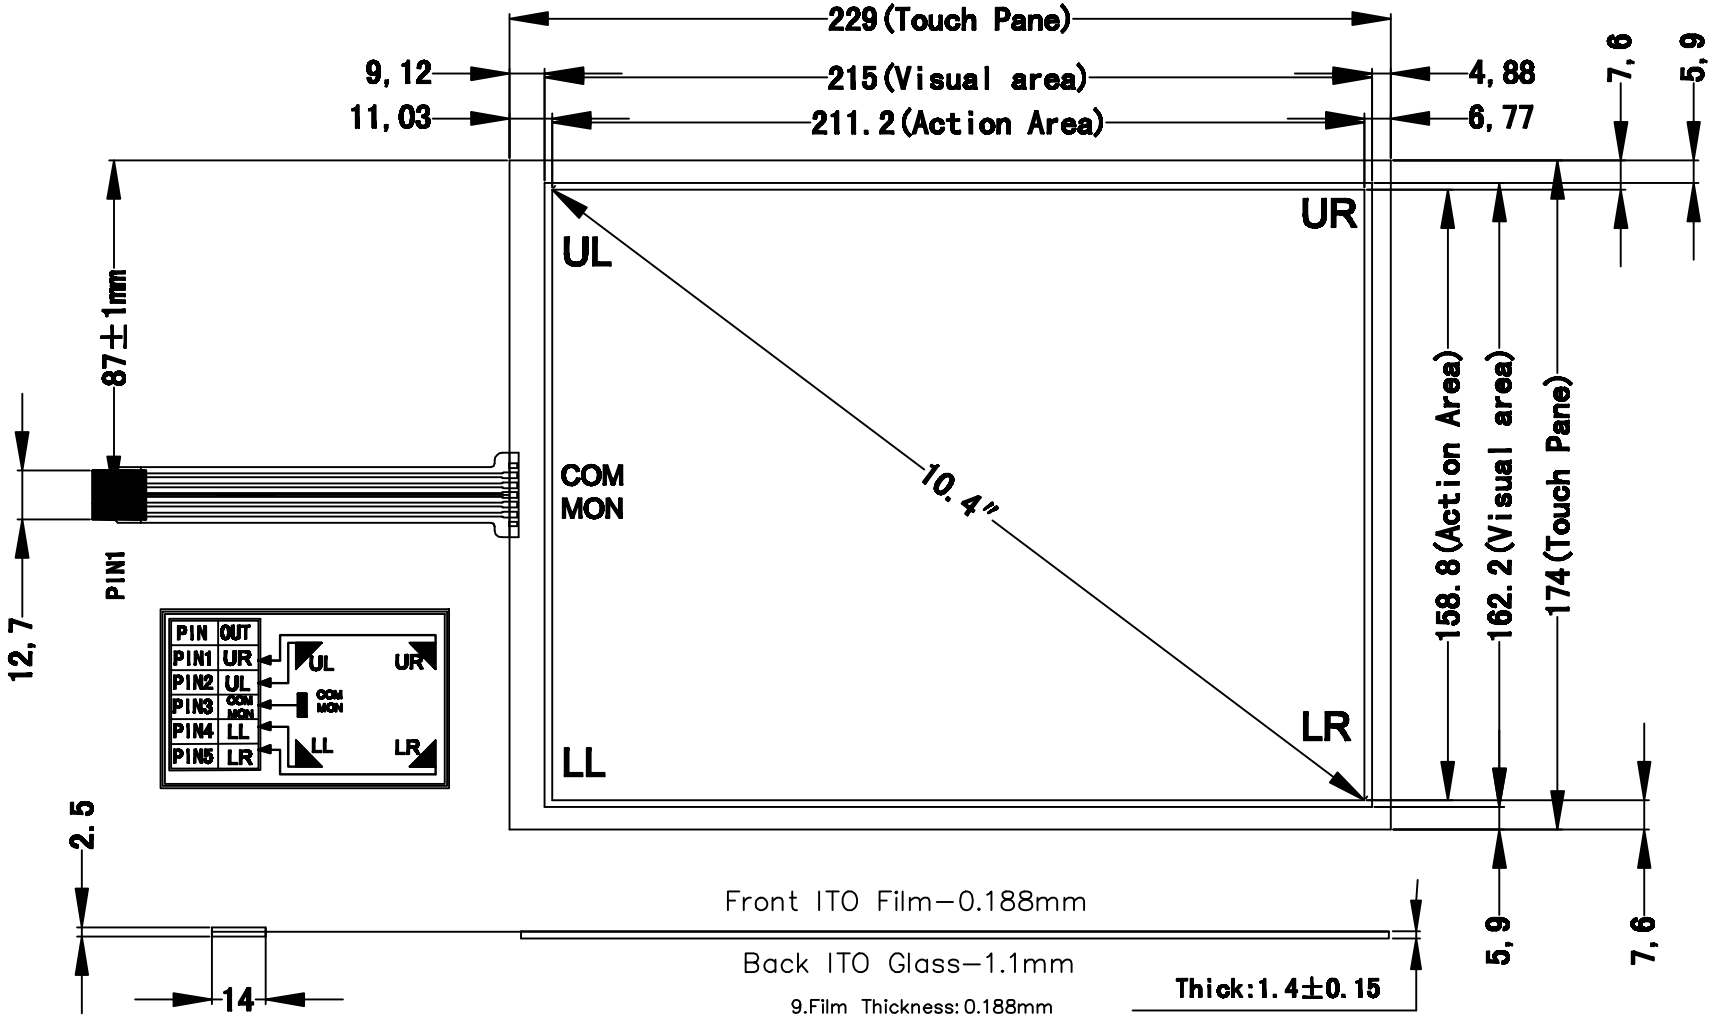

Instruction:
1.Type: Film to Glass
2.Operating Voltage: ≤10V
3.Response Time: ≤10ms
4.Storage Temperature: −20℃~+70℃
5.Operation Temperature/Humidity : −10℃~+60℃/ 20%~95%
6.Hitting Life: >10,000,000 Times ,250gf Force;
7.writting Life>1,000,000 Times 250gf Force;
8.Connect Material: FPC+PIN
9.Film Thickness: 0.188mm
10.Glass Thickness: 1.1mm
11.Light transmission: ≥78%
12.Force: 100g or more
13.Linearity: ≤5%
14.Insulation: ≥20MΩ
15.Resistance: 50Ω<PIN1, PIN2<250Ω
50Ω<PIN2, PIN4<250Ω
50Ω<PIN4, PIN5<250Ω
50Ω<PIN5, PIN1<250Ω
16.Surface Hardness≥3H(pencil)

Touch—Pane—VTW5104A0

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	1.0
UNIT	mm	TOLERANCE	±0.3m	NO.	1 of 1
DESIGN	Jeka	DATE	20090610		
CHECK	peter • li	DATE	20090611		
RELEASE	J	DATE	20090612		